

1 2 3 4 5 6 7 8

A




B

C

D

E

F

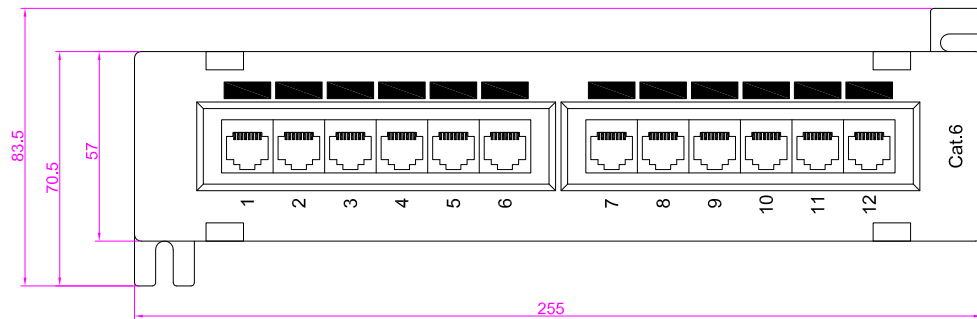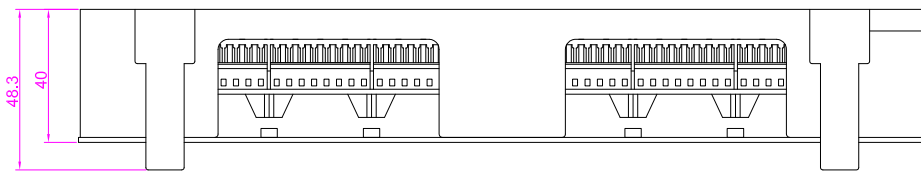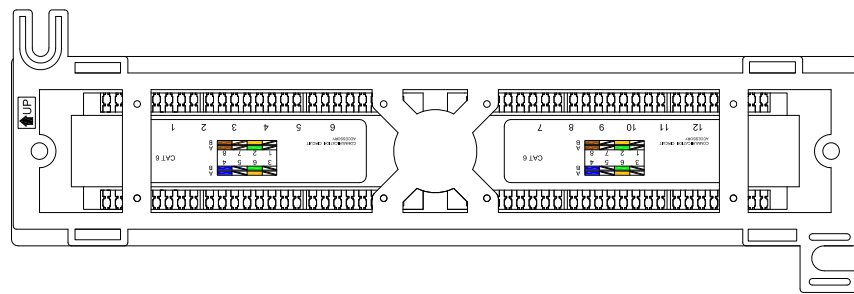

- ELECTRICAL:**  
 1.CURRENT RATING: 1.5AMP  
 2.CONTACT RESISTANCE: 100 MILLIOHMS MAX  
 3.INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC  
 4.DIELECTRIC STRENGTH: 750 VAC RMS 60Hz,1MIN
- ENVIRONMENTAL:**  
 1.STORAGE: -40°C TO +70°C  
 2.OPERATION: 0°C TO 60°C
- MECHANICAL:**  
 1.HOUSING MATERIAL: PBT+%15Glass  
 2.PANEL FRAME MATERIAL: SPCC,BLACK OR INDUSTRIAL GREY ELECTROSTATIC POWDER COATING  
 3.RJ45 JACK LIFE: 750 TIMES MIN  
 4.IDC LIFE: 200 TIMES MIN  
 5.CONTACT MATERIAL: PHOSPHOR BRONZE STAMP PIN T=0.30mm  
 6.IDC CONTACT MATERIAL: PHOSPHOR BRONZE T=0.05mm(50µm) NICKEL PLATING  
 7.WIRE: AWG 22~26

CHANGE			
EDITI	MODIFICATION	DATE	SIGNATURE

A

B

C

D

E

F



shenzhen Copperled Technology Co.,Ltd

TITLE:UTP Cat.6 Patch Panel 12Port Wall Mounted Type

P/N: CL-U12P-C602

Color coding iformation			
T568A		T568B	
1	White/Green	1	White/Orange
2	Green	2	Orange
3	White/Orange	3	White/Green
4	Blue	4	Blue
5	White/Blue	5	White/Blue
6	Orange	6	Green
7	White/Brown	7	White/Brown
8	Brown	8	Brown

产品编号 PRODUCT NO	YT-P2612P-C6	品名规格 DESCRIPTION	UTP Cat.6 Patch Panel, 12 Ports, Dual IDC		图号 AWG NO		
材料 MATERIAL		单位 UNIT	MM	比例 SCALE	1:1	版本 EDITI	A0
尺寸公差表 DIMENSIONAL TOLERANCE		第三视图法 THIRD ANGLE PROJECTION		制图 DRAWN	Pengcheng LI	日期 DATE	24/08/2018
X.X ±0.3				核对 CHECK		日期 DATE	
X.XX ±0.10				批准 APPROVAL		日期 DATE	
X.XXX ±0.050						日期 DATE	
ANGLE 1°							

1 2 3 4 5 6 7 8