


UTP 0.5u Cat.6A Patch Panel 24Port with Back Bar
CL-U24P-C6A03

Cat 6A 24 Port UTP Patch panel

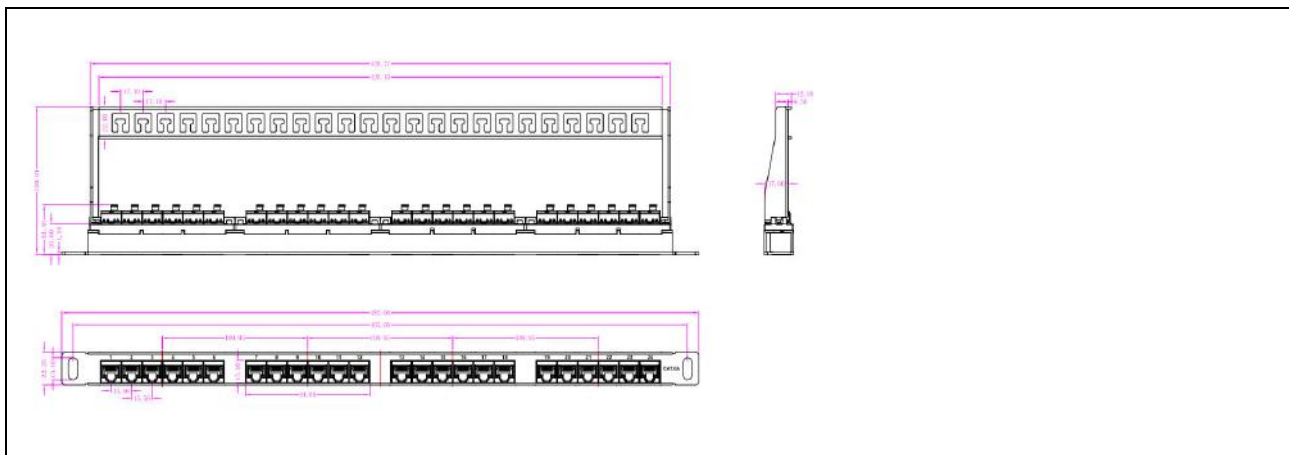

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS
2. CURRENT rating : 1.5 AMP
3. CONTACT RESISTANCE : 100 MILLIOHMS MAX
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC
5. DIELECTRIC

ENVIRONMENTAL:

1. STORAGE : -40° TO+85°
 2. OPERATION : 0° TO+70°
- CONFORM TO TIA/EIA 568B CATEGORY 6A
MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

MECHANICAL:

1. CONTACT MATERIAL : PHOSPHOR BRONZE WITH NICKEL PLATING
2. SHIELD MATERIAL BRASS C2680
3. RJ45 JACK LIFE: 750 TIMES MIN
4. IDC LIFE: 200 times min
5. IDC MATERIAL: PC UL94V0
6. PANEL FRAME: CARBON STEEL, POWDER COATING IN BLACK COLOR
7. WIRE : AWG 22-26
8. Testing condition of transmitting capability : 500MHz